



65DP30FE

65" 4K UHD DIGITAL SIGNAGE DISPLAY

The Hisense DP30FE is a high-performance 4K digital signage solution built for 16/7 operation, offering outstanding reliability and value across diverse commercial settings—including museums, stadiums, retail stores, and corporate offices. Combining powerful content management with remote device control, it enables real-time updates, data-driven insights, and engaging visual experiences that captivate audiences. The DP30FE's intuitive home screen interface ensures effortless usability, while remote access makes device control simple and efficient from anywhere. Designed to deliver professional-grade performance at a competitive price, the DP30FE offers exceptional value for businesses looking to elevate their communications.

Highlights



Captivating 4K Visuals

With 85% NTSC color coverage and 4K Ultra HD resolution, every detail is rendered in studio-grade precision. Featuring 1.07 billion colors and professional-grade color accuracy, this display delivers unparalleled clarity and vibrancy for professional-grade photo and video viewing.



Anti-glare with 25% haze

The 25% haze panels effectively minimize reflections while maintaining optimal image quality, making sure the critical information is always visible. Additionally, the anti-glare coatings enhance the perceived contrast ratio, delivering a sharper and more vibrant visual experience.



178° Wide Viewing Angle

178° Ultra-Wide Viewing Angle ensures vibrant visuals from any direction — perfect for high-traffic retail stores, museums, and stadiums. Engage passersby with crisp content that stays vivid, even at extreme angles.



Smart Ambient Light Sensor

The display's built-in ambient light sensor automatically adjusts brightness to ambient conditions, ensuring optimal viewing comfort. Certified with Energy Star certification, it reduces energy consumption while delivering eco-conscious performance without compromising visual quality.



Landscape and Portrait

The display seamlessly adapts to both portrait and landscape modes, enabling flexible installations in retail spaces, museums, stadiums, and corporate environments while maintaining 4K visual consistency across orientations.



Built-in VisionInfo

VisionInfo is a cloud-based platform providing end-to-end content management, scheduling, remote updates, and centralized device control. This powerful yet user-friendly platform enables seamless device management and real-time monitoring from any location.



Specifications

Digital Display Panel

Backlight Type	
Type	DLED
Size	ADS
Resolution	65"
Refresh rate	3840 x 2160
Color Depth	60Hz
Brightness(Typ.)	1.07G (8 Bits+FRC)
Contrast Ratio(Typ.)	350 nits
Response Time(Typ.)	1200:1
Viewing Angle(Min.)	8ms
Color Gamut(Typ.)	178° / 178°
Haze	85% NTSC
Orientation	25%
Lifetime	Landscape & Portrait
Operation Hours	up to 30,000 hrs
	7Day x 16Hour

System

Operating System	
Memory	Android 9
Storage	2G DDR4
	16G EMMC
Language	Simplified Chinese, English, French, German, Polish, Spanish, Russian, Italian, Finnish, Norwegian, Swedish, Hebrew, Arabic, Thai, Malay, Indonesian, Catalan, Japanese

Connectivity

Input	HDMI(2.0) x 3 USB2.0(A) x 2 RS232(RJ45) x 1 LAN(RJ45) x 1 Audio(3.5mm) x 1
Output	2.4/5.0GHz dual, 802.11a/b/g/n/ac
WiFi	BT5.1
Bluetooth	

Environment

Operating Temperature	
Operating Humidity	0°~40°C
	10%~80% Non-Condensing

Power

Power Supply	
Power Consumption (Typ.)	AC 100~240V (50/60Hz)
Power Consumption (Max.)	130W 170W
Standby Consumption	<0.5W (Standby Mode)

Speaker

Built-in Speaker	10W x2
------------------	--------

Physical

Bezel Color	
Set Dimension(W×H×D)	Black
Bezel width(T/L/R/B)	1445.9 x 837.6 x 74.8mm
Net Weight	T: 8.3mm, L/R: 2.7mm, D: 15.7mm
Packing Dimension (W×H×D)	18.3kg
Gross Weight	1649 x 997 x 150mm
VESA Mount	26.1kg
	400mm x 400mm

Certification


Standard Certification CB/CE/ERP/SouthAfrica Energy Efficiency/cTUVus/CEC/FCC

EMC	Class B
Enviroment	Energy Star 8.0
IP Rating	IP5X



Dimensions

65" | 1445.9 x 837.6 x 74.8mm
17.3kg

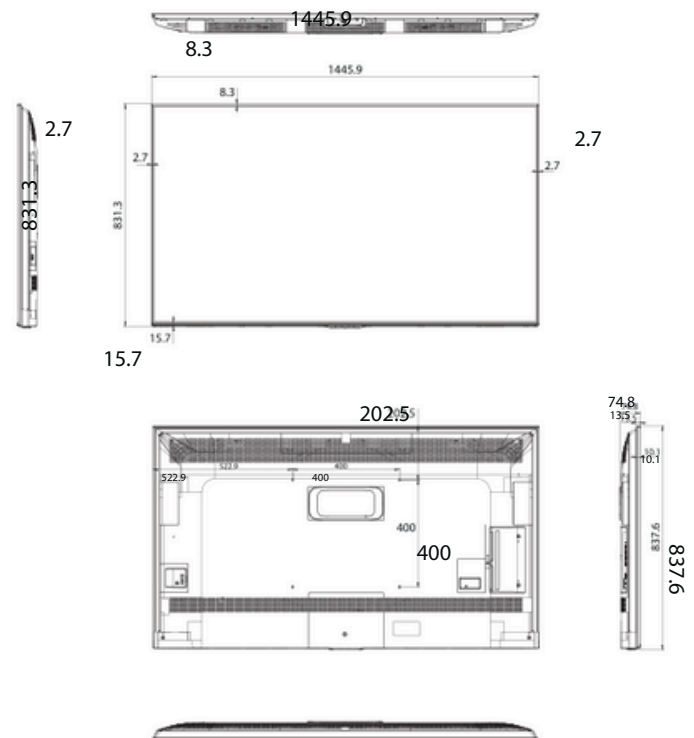

Product specifications may vary per region, and specifications are subject to change. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

Learn More: www.hisense-b2b.com | Contact Us: sales@hisense-b2b.com

LinkedIn: @Hisense Commercial Display | @Hisense B2B Europe | @Hisense B2B USA | @Hisense B2B Australia